


BB-A4983, board revision B
 OLIMEX LTD, PLOVDIV, BULGARIA 2014
<https://www.olimex.com>

This hardware design by Olimex LTD is licensed under a Creative Commons Attribution-ShareAlike 3.0 Unported License.

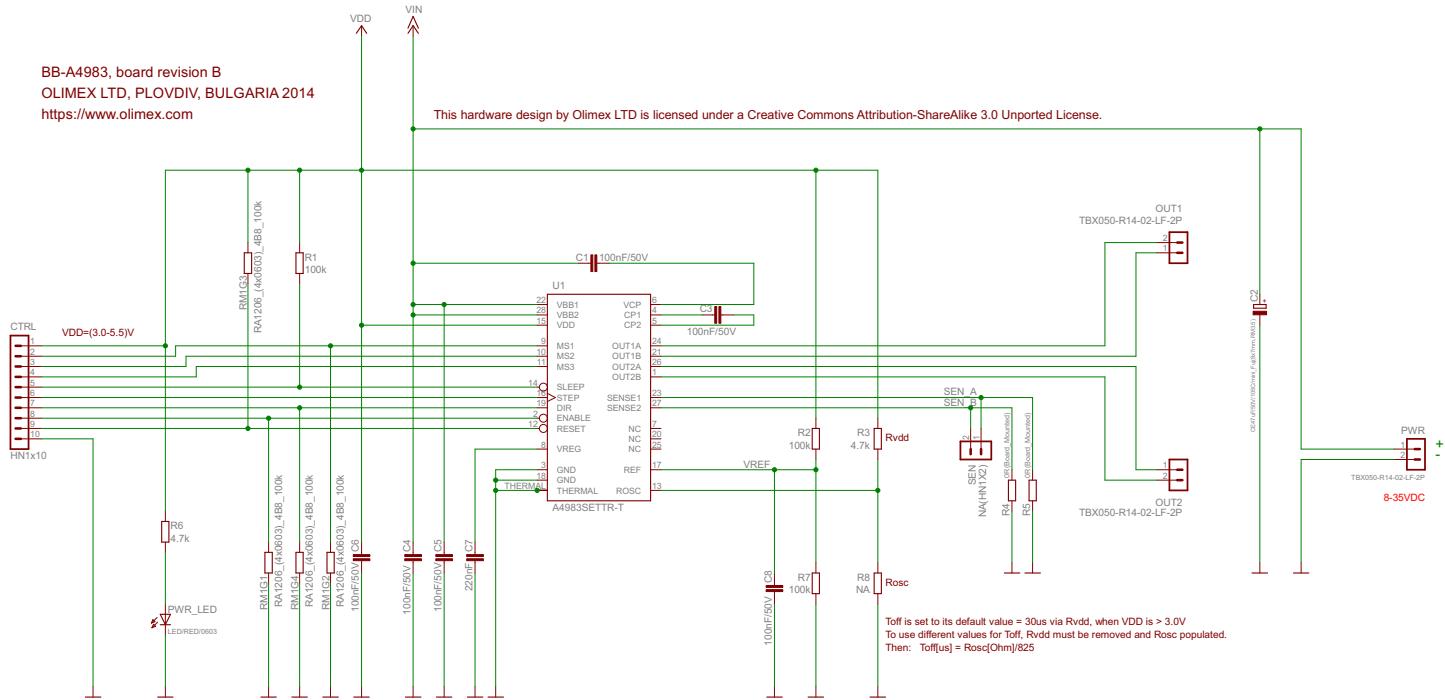

Toff is set to its default value = 30us via Rvdd, when VDD is > 3.0V
 To use different values for Toff, Rvdd must be removed and Rosc populated.
 Then: $T_{off}[\mu s] = R_{osc}[\text{Ohm}] / 825$

DMOS Microstepping Driver with Translator